

# MENUMASTER<sup>®</sup> Commercial

Project #: \_\_\_\_\_

Item #: \_\_\_\_\_



## Heavy Volume MenuMaster<sup>®</sup> Commercial MDC/DEC Series

### Power Output

- 1000-2100 Watts of power
- Unique method of microwave energy distribution provides superior even heating throughout the entire cavity

### Multi-language universal operation, with programming flexibility

- Oven interface and programming software supports 24 languages
- Smart USB connectivity standard
- Compatible with ACP Programming Application

### Easy to Use

- Up to 100 programmable menu items simplifies cooking
- 11 power levels and 4 cooking stages for cooking flexibility
- Multiple quantity function automatically calculates cooking times for multiple portions
- Automatic Voltage Sensor adjusts to the power supply (*North America only >1200W*)
- See-through door and lighted interior for monitoring without opening the door
- Ample 17 liter (0.6 cubic ft.) capacity accommodates a standard half-sized pan
- Stackable to save valuable counter space

### Easy to Maintain

- Stainless steel exterior and interior for easy cleaning and increased durability
- Removable, cleanable air filter protects oven components
- Constructed to withstand the foodservice environment, multiple users and variable ambient temperatures
- Gasket sealed Borosilicate Glass tray for easy cleaning
- Interlock switch assembly is engineered for maximum durability and long life.

## Market Regions: Americas & Europe

**Chef Line | Heavy Volume**  
This category of microwave oven is ideal for...

### Applications

- Fast casual dining
- Prep stations
- Bars & grills
- Quick service restaurants
- Casual dining
- Convenience stores
- Bakery cafés
- Kiosks
- Food courts

### Through put potential by oven wattage (items per hour)

Food item	1000W	1200W	1400W	1800W	2100W
Steamed Shrimp (227g (8oz))	22	23	24	33	38
Scrambled Eggs (120g (4oz))	48	51	55	65	72
Steamed Rice (1.2kg (8cups))	2	3	3	5	7
1 Baked potato (255g (9oz))	17	18	19	21	29
Salmon fillet (227g (8oz))	19	20	21	26	29
Chocolate Cake in a Cup	57	60	65	80	97
Fresh Steamed Veggies (170g (6oz))	45	48	51	65	80
Asparagus (227g (8oz))	29	30	33	45	51
Dumplings (6ea)	19	19	20	24	28

All ACP, Inc. commercial ovens are supported by our Culinary Center. Do not hesitate to contact us for any questions regarding food preparation, menu development and cooking times: [testkitchen@acpsolutions.com](mailto:testkitchen@acpsolutions.com)



### Optional Accessories

- Cavity shelf (SE10)
- Stainless cart/equipment stands: (CA24, CA30)
- Non-stick baskets (TB10/S, SB10/S, MB10/S)
- Oven Cleaner and Shield Protectant (CL10\*, SH10\*, CL10W\*\*, PR10W\*\*)

### Service

All products are backed by the ACP, Inc.  
24/7 ComServ Support Center



### Warranty

Warranty Certificate for this product can be found on the ACP, Inc. website at [www.acpsolutions.com/warranty](http://www.acpsolutions.com/warranty)



### Safety and Sanitation

This ACP, Inc. product meets and exceeds safety and sanitation standards set for commercial microwave ovens by UL, ETL, NSF, CSA, FDA, ETL EU, and CE



For other market regions, please see product literature online

\*Only shipped in U.S.A.

\*\* Only shipped in Europe



© 2020 ACP, Inc.  
Cedar Rapids, Iowa 52404

225 49th Ave. Dr. SW Cedar Rapids, IA 52404 U.S.A.

800-233-2366

319-368-8120


Fax: 319-368-8198

[www.acpsolutions.com](http://www.acpsolutions.com)

AIA File #:

Specification #:

# MenuMaster® Commercial Microwave MDC/DEC Series | Heavy Volume Americas & Europe

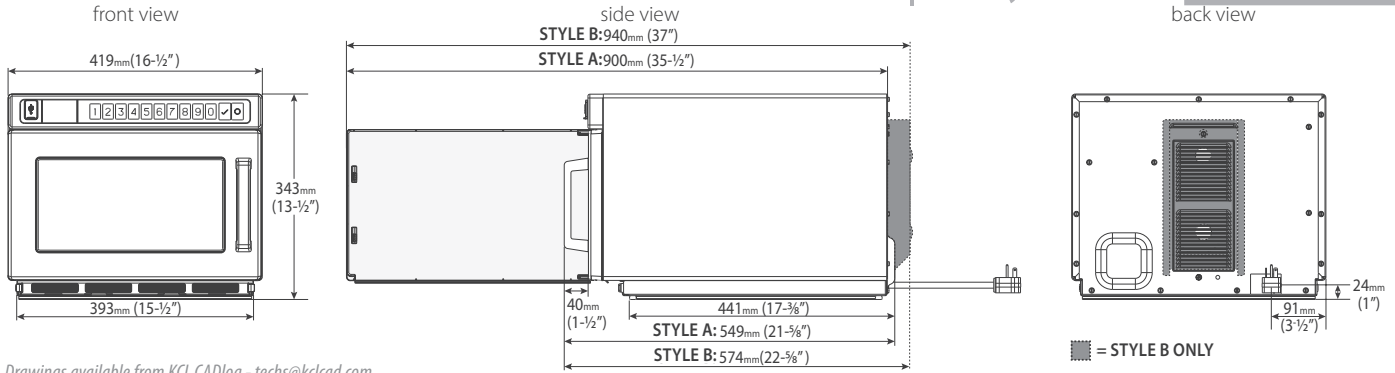

Drawings available from KCL CADlog - techs@kclcad.com

Dimensions		STYLE A	STYLE B
Exterior	Height	343 (13 1/2")	343 (13 1/2")
	Width	419 (16 1/2")	419 (16 1/2")
	Depth†	549 (21 5/8")†	574 (22 5/8")†
Cavity	Height	171 (6 3/4")	171 (6 3/4")
	Width	330 (13")	330 (13")
	Depth	305 (12")	305 (12")
Usable Cavity Space		17 liter (0.6 cubic ft.)	17 liter (0.6 cubic ft.)
Door Depth		900 (35 1/2"), 90°+ door open	940 (37"), 90°+ door open
Installation Clearance	Top	51 (2")	51 (2")
	Sides	25 (1")	25 (1")
	Back	None	None
Shipping Carton	Height	473 (18 5/8")	473 (18 5/8")
	Width	556 (21 7/8")	556 (21 7/8")
	Depth	625 (24 5/8")	625 (24 5/8")
Weight			
Product Weight	Ship weight (approx.)	UPS Shippable	
31 kg. (68 lbs)	34 kg. (74 lbs)	Yes, ISTA 1A	

Features	
Configuration	Countertop
Stackable	Yes
Display	LCD
Control System	Touchpad
Programmable Control	Yes, 10 pads
Braille	Overlay available
Settings Programmable	100
Max. Cooking Time	60:00
Microwave Distribution	Double rotating antennas, top and bottom
Power Levels	11
Defrost	Yes, power level 2
Time Entry Option	Yes
Multiple Portion Setting	Yes, X2 by default, optional up to X9
Stage Cooking	4 stages
Interior Light	Yes, LED
Automatic Voltage Sensor	Yes (North America only >1200W)
Air Filter	Yes, 1 removable
Signal	End of cycle, adjustable
Door Handle	Grab & Go
Exterior Finish	Stainless steel
Interior Finish	Stainless steel with gasket sealed borosilicate tray

Measurements are millimeters. Measurements in ( ) are US Standard

\* IEC 60705 Tested

† Includes handle

EMEA = Europe, the Middle East and Africa; APAC = Asia Pacific and Oceania; LATAM = Latin America

## Electrical Configuration

Region	Model#/ UPC	Automatic Voltage Sensor	Exterior Depth Style	Power Consumption	Power Output (microwave)	Power Source	Plug Configuration	Cord Length	Frequency	Magnetron
North America single phase	<b>MDC1015</b> 728028470956	No	A	1610W, 14.4 A	1000W*	120V, 60Hz, 15A, single phase	NEMA 5-15P	1.5m (5 ft.)	2450MHz	2
North America single phase	<b>MDC12A2</b> 728028020632	No	A	2000W, 16.8 A	1200W*	120V, 60Hz, 20A, single phase	NEMA 5-20	1.7m (5.5 ft.)	2450MHz	2
North America single phase	<b>MDC182</b> 728028020649	Yes	A	3000W, 14.4 A	1800W*	208/240V, 60Hz, 20A, single phase	NEMA 6-20	1.7m (5.5 ft.)	2450MHz	2
North America single phase	<b>MDC212</b> 728028020656	Yes	B	3200W, 15.3 A	2100W*	208/240V, 60Hz, 20A, single phase	NEMA 6-20	1.7m (5.5 ft.)	2450MHz	2
Brazil single phase	<b>MDC212B</b> 728028244427	No	B	3200W, 15.3 A	2100W*	250V, 60Hz, 16A, single phase	YP-05	1.7m (5.5 ft.)	2450MHz	2
EMEA, APAC, LATAM single phase	<b>DEC14E2</b> 719881159300	No	B	2300W, 10.0 A	1400W*	230-240V, 50Hz, 16A, single phase	CEE 7/7 "Schuko"	1.7m (5.5 ft.)	2450MHz	2
EMEA, APAC, LATAM single phase	<b>DEC18E2</b> 719881159317	No	B	2900W, 12.6 A	1800W*	230-240V, 50Hz, 16A, single phase	CEE 7/7 "Schuko"	1.7m (5.5 ft.)	2450MHz	2
EMEA, APAC, LATAM single phase	<b>DEC21E2</b> 719881167718	No	B	3100W, 13.5 A	2100W*	230-240V, 50Hz, 16A, single phase	CEE 7/7 "Schuko"	1.7m (5.5 ft.)	2450MHz	2
EMEA (UK), APAC single phase	<b>DEC14E2U</b> 728028315851	No	B	2300W, 10.0 A	1400W*	230-240V, 50Hz, 13A, single phase	BS1363A	1.7m (5.5 ft.)	2450MHz	2
EMEA (UK), APAC single phase	<b>DEC18E2U</b> 728028315868	No	B	2900W, 12.6 A	1800W*	230-240V, 50Hz, 13A, single phase	BS1363A	1.7m (5.5 ft.)	2450MHz	2

**ACP** INC. 225 49th Ave. Dr. SW, Cedar Rapids, IA 52404 U.S.A.  
800-233-2366 • 319-368-8120 • Fax: 319-368-8198  
www.acpsolutions.com

Part No. 20271302  
Updated 10/26/2020  
© 2020 ACP, Inc., Cedar Rapids, Iowa 52404