

XpressChef®

Project #: _____

Item #: _____



High Speed Oven XpressChef® 3i (MRX) Series

Superior cooking results FAST!

- Enhanced cavity airflow for perfect browning & crisping
- 3000W impingement enhances browning. Easily adjustable 0-100% fan speed
- 95° - 270°C (200° - 520°F) temperature range cooks a variety of items
- 1000 or 2000W top antenna feed microwave system heats quickly, reduces cooking time.

Minimized footprint, maximized cavity design

- Compact footprint fits on 71cm (28") deep counter
- Flexibility to install with or without 10cm (4") leg kit
- Easily accommodates a 30cm (12") pizza

Multi-language universal operation, with programming flexibility:

- Touchscreen and programming software supports 25 languages
- Image-based menu selection eliminates language and literacy barriers
- Connectivity Standard: WiFi, Ethernet, and Smart USB standard

Appropriate for front-of-house display

- Sleek, contemporary styling
- True-Touch™ HD Touchscreen. Fully customizable 178mm (7") smartphone-like display
- Catalytic converter built-in for ventless operation
- Quiet operation: fan speeds auto-adjust based on operation mode

Safe operation and simple cleaning

- Inner door drops down below cooking surface for safe removal of food from cavity
- Smooth door surface allows for direct application of approved cleaners
- Non-stick oven liners preinstalled for easy cleaning***
- Clean magnetic air filters in one-step
- Automatic Voltage Sensor adjusts to the power supply. (North America only)
- Rapid cool down allows for expedited end-of-day cleaning

XpressChef® 3i (MRX) Series | Heavy Volume This category of high speed oven is ideal for...

Applications

- Convenience Stores
- Healthcare
- Delis
- Satellite Locations
- Hotel Room Service
- QSR
- Coffee Shops
- Snack Bars
- Bars/Pubs

Through put potential (per hour)

| Food item | 1000W | 2000W |
|------------------------------|-------|-------|
| 30cm (12") frozen pizza | 18 | 21 |
| 15cm (6") toasted sandwiches | 60 | 80 |
| Grilled fresh Salmon | 22 | 28 |
| 0.45kg (1 lb.) fresh shrimp | 55 | 55 |
| Toasted Bagel | 120 | 120 |
| Chicken wings | 15 | 24 |
| Quesadillas | 65 | 70 |

Location of Oven(s):

- Kitchen countertop
- Front-of-house countertop
- Equipment stand
- Oven stacking cart (available accessory)

All ACP, Inc. commercial ovens are supported by our Culinary Center. Do not hesitate to contact us for any questions regarding food preparation, menu development and cooking times: testkitchen@acpsolutions.com



Included Accessories:

- Cook plate (CP10)
- Compact oven paddle (PA10R)
- Non-stick liners (TL10R***)

Optional Accessories

- Panini grill plate (RGR10)
- Panini Press (PRS10R)
- Pizza Stone(ST10R)
- 4" (102mm) Leg kit (LG10)
- Oven paddle (PA10)
- Non-stick liners (TL10R)
- Non-stick baskets (TB10S, SB10S, MB10S)
- Back Cover Panel (BC10R)
- Top storage shelf (TS10R)
- Oven Cleaner and Shield Protectant (CL10*, SH10*, CL10W**, PR10W**)

Service

All products are backed by the ACP, Inc. 24/7 ComServ Support Center

Warranty

Warranty Certificate for this product can be found on the ACP, Inc. website at www.acpsolutions.com/warranty

Safety and Sanitation

This ACP, Inc. product meets and exceeds safety and sanitation standards set for commercial microwave ovens by UL, ETL, NSF, CSA, FDA, ETL EU and CE



*Only shipped in U.S.A.

** Only shipped in Europe

*** Select models only

225 49th Ave. Dr. SW Cedar Rapids, IA 52404 U.S.A.

800-233-2366

319-368-8120

Fax: 319-368-8198

www.acpsolutions.com




© 2023 ACP, Inc.
Cedar Rapids, Iowa 52404

AIA File #:

Specification #:

XpressChef® 3i (MRX) Series | High Speed Oven

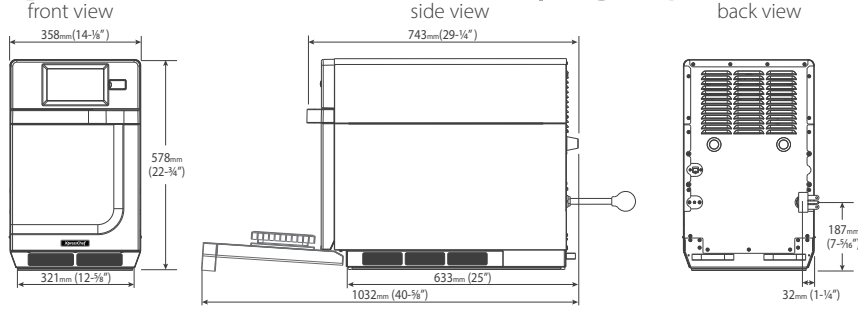

Drawings available from
KCL CADlog - techs@kclcad.com

Dimensions

| | | | |
|--------------------------------|--------------------------------|------------------|-----------------|
| Exterior | H 578 (22 3/4") | W 358 (14 1/8") | D 743 (29 1/4") |
| Cavity | H 178 (7") | W 312 (12 1/4") | D 312 (12 1/4") |
| Usable Cavity Space | 17.2 liter (0.61 cubic ft.) | | |
| Door Depth | 1032 (40 5/8"), drop down door | | |
| Installation Clearances | Top: 51 (2") | Sides: 13 (1/2") | Back: None |
| Shipping Carton | H 677 (26 5/8") | W 584 (23") | D 883 (34 3/4") |

Weight

| Model Type | Product Weight | Ship weight (approx.) |
|--------------|------------------|-----------------------|
| 2x Magnetron | 61 kg (134 lbs.) | 69 kg (152 lbs.) |
| 1x Magnetron | 53 kg (116 lbs.) | 61 kg (134 lbs.) |

Features

| | |
|---------------------------------|--|
| Configuration | Countertop |
| Stackable | Yes, with kit |
| Display | 178 (7") Capacitive Touch, High resolution LCD display |
| USB Port | Yes |
| Connectivity | Wifi and Ethernet |
| Program Menu | Tab & Multi-level menu capability |
| Menu Capacity | 1200+ items |
| Max. Cooking Time | 99:99 |
| Temperature Range | 95° - 270°C (200° - 520°F) |
| Microwave Distribution | Rotating antennas, top |
| Fan Speed | 0-100% |
| Power Levels | 11 |
| Defrost | Yes, microwave only, power level 2 |
| Time Entry Option | Yes |
| Stage Cooking | Yes, 4 |
| Catalytic Converter | Yes# |
| Automatic Voltage Sensor | Yes (North America only) |
| Air Filter | 3 removable, with clean filter reminder |
| Rack | Removable cooking surface |
| Door Opening | Pull down, ergonomic handle |
| Exterior Finish | Stainless steel and Painted Steel |
| Interior Finish | Stainless steel |

ACP, Inc. requires installing a type D circuit breaker for all high-speed oven installations.

Measurements are millimeters. Measurements in () are US Standard

* IEC 60705 Tested

† Includes handle

‡ Catalytic convertor filters grease and odors from the air. This product conforms to the Ventless Operation Recommendations set forth by NFPA96 using EPA202 test method

EMEA = Europe, the Middle East and Africa; APAC = Asia Pacific and Oceania; LATAM = Latin America

Also available in colors. For details:

<https://acpsolutions.com/xpresschef/xpresschef-3i/>

Electrical Configuration

| Region | Model#/UPC Code | Non-Stick Liners Installed | Power Output* | | | Power Source | Plug Configuration | Cord Length | Frequency | Magnetron |
|-----------------------------------|-------------------------------|----------------------------|-------------------|-----------|-------------|---|--------------------|--------------|-----------|-----------|
| | | | Power Consumption | Microwave | Impingement | | | | | |
| North America single phase | MRX1 728028422825 | No | 3600 W, 18.2 A | 1000 W* | 3000 W | 208-240 V, 60 Hz, 20 A, single phase | NEMA 6-20 | 1.5m (5 ft.) | 2450 MHz | 1 |
| North America single phase | MRX2 728028422849 | No | 5950 W, 28.6 A | 2000 W* | 3000 W | 208-240V, 60 Hz, 30 A, single phase | NEMA 6-30 | 1.5m (5 ft.) | 2450 MHz | 2 |
| EMEA, APAC, LATAM single phase | MRX51 728028422863 | Yes | 3680 W, 16 A | 1000 W* | 3000 W | 230-240 V, 50 Hz, 16 A, single phase | CEE 7/7 "Schuko" | 1.5m (5 ft.) | 2450 MHz | 1 |
| EMEA, APAC, LATAM single phase | MRX52 728028422887 | Yes | 5950 W, 28.6 A | 2000 W* | 3000 W | 230-240 V, 50 Hz, 32 A, single phase | IEC 309 | 1.5m (5 ft.) | 2450 MHz | 2 |
| EMEA, APAC, LATAM multi phase | MRX523 728028422900 | Yes | 5950 W, 16 A | 2000 W* | 3000 W | 400V, 50 Hz, WYE, 16 A, 3 phase, 5 wire | IEC 309 | 2.4m (8 ft.) | 2450 MHz | 2 |
| EMEA (UK), APAC single phase | MRX51U 728028423006 | Yes | 2450 W, 13 A | 1000 W* | 3000 W | 230-240 V, 50Hz, 13 A, single phase | BS1363/A | 1.5m (5 ft.) | 2450 MHz | 1 |
| Australia single phase | MRX51A 728028423044 | Yes | 3250 W, 15 A | 1000 W* | 3000 W | 230-240 V, 50Hz, 15 A, single phase | A53112 | 1.5m (5 ft.) | 2450 MHz | 1 |
| Brazil single phase | MRX1B 728028423211 | No | 3550 W, 16.7 A | 1000 W* | 3000 W | 220V, 60 Hz, 16 A, single phase | NBR 14136 | 1.5m (5 ft.) | 2450 MHz | 1 |
| Brazil single phase | MRX2B 728028423259 | No | 5550 W, 25.8 A | 2000 W* | 3000 W | 220V, 60 Hz, 32 A, single phase | IEC 309 | 1.5m (5 ft.) | 2450 MHz | 2 |
| Saudi Arabia single phase | MRX1SA 728028423235 | No | 3550 W, 16.7 A | 1000 W* | 3000 W | 220V, 60 Hz, 16 A, single phase | Direct Wire | 1.5m (5 ft.) | 2450 MHz | 1 |
| Saudi Arabia single phase | MRX2SA 728028423273 | No | 5550 W, 25.8 A | 2000 W* | 3000 W | 220V, 60 Hz, 32 A, single phase | Direct Wire | 2.4m (8 ft.) | 2450 MHz | 2 |



225 49th Ave. Dr. SW, Cedar Rapids, IA 52404 U.S.A.
800-233-2366 • 319-368-8120 • Fax: 319-368-8198
www.acpsolutions.com

Part No. 20218006

Updated 07/10/2023

© 2023 ACP, Inc., Cedar Rapids, Iowa 52404

an Ali Group Company



The Spirit of Excellence

Specification #:

AIA File #: